

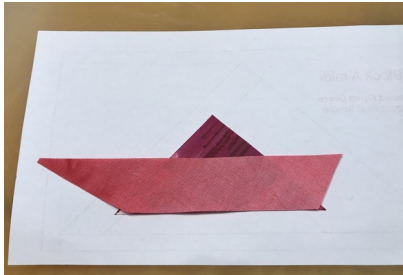
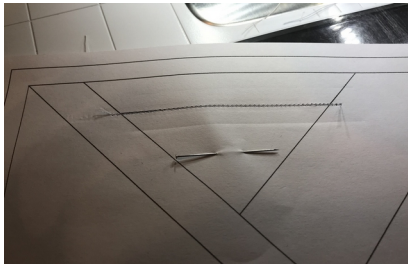

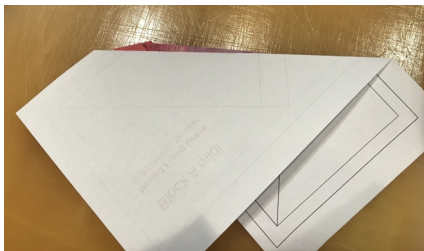
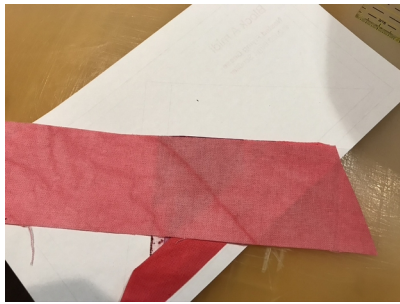



Paper Piecing – Step-by-Step Instructions with Photos

I have roughly cut out my pieces for demonstrating the process.


 <p>1.</p> <p>This is a view of the printed side of the PP template on which you sew.</p>	 <p>2.</p> <p>Right side up, position piece 1 centered on the unprinted side of the template and pin it in place on the printed side.</p>
 <p>3.</p> <p>Right sides together align part 2 with the bottom edge of part 1 and sew it on the printed side of the template.</p>	 <p>4.</p> <p>Start and end your seam approx. ¼" before and after the printed line.</p>
 <p>5.</p> <p>Fold part 2 open and pin it in place on the printed template side.</p>	 <p>6.</p> <p>Fold over the template along the part 3 seam line and trim the excess fabric of parts 1 and 2 to a scant seam allowance.</p>

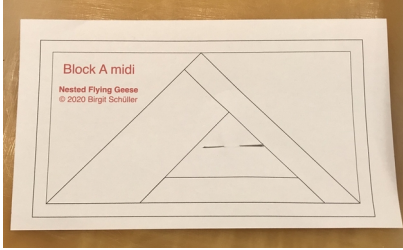


7.
Right sides together align part 3 with the edge of parts 1 + 2 and sew it on the printed side of the template.

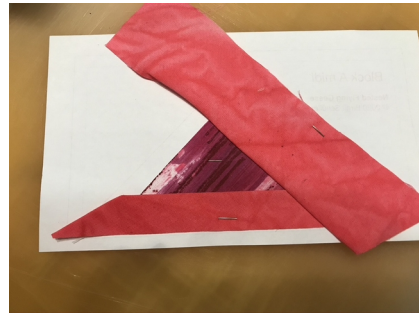


8.
Fold part 3 open and pin it in place on the printed template side.

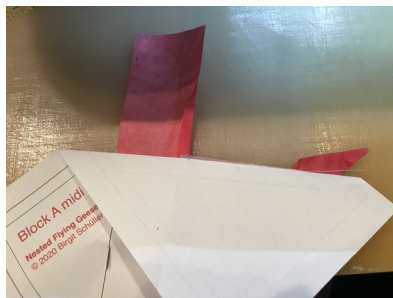


9.
Fold over the template along the part 4 seam line and trim the excess fabric of parts 1, 2 and 3 to a scant seam allowance.

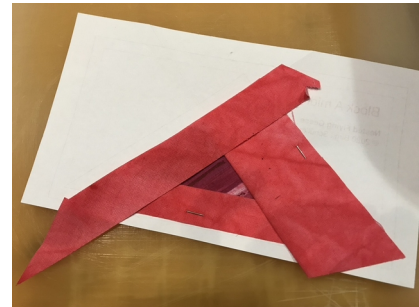

10.
Right sides together align part 4 with the edge of parts 1 - 3 and sew it on the printed side of the template.

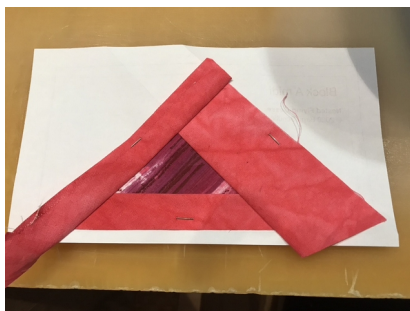

11.
Fold part 4 open and pin it in place on the printed template side.

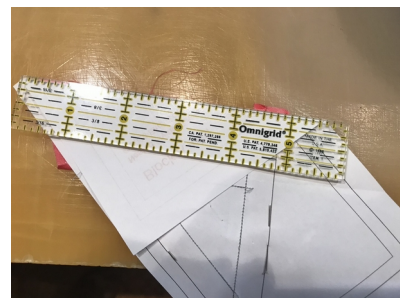


12.
Fold over the template along the part 5 seam line and trim the excess fabric of parts 3 and 4 to a scant seam allowance.



13.

Right sides together align part 5 with the edge of parts 3 + 4 and sew it on the printed side of the template.

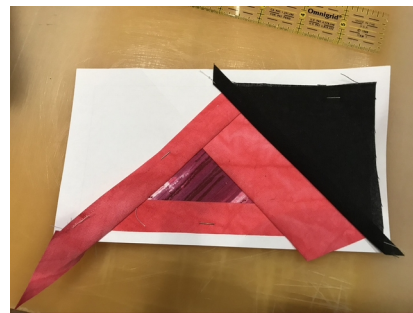

14.

Fold part 5 open and pin it in place on the printed template side.



15.

Proceed in the same way with part 6. Fold part 6 open and pin it in place on the printed template side.



16.

Press the assembled block. On the printed side of the template, trim it back to the outermost line ($\frac{1}{4}$ " seam allowance).